



3




Raccordi a saldare ISO / EN
Welding fittings



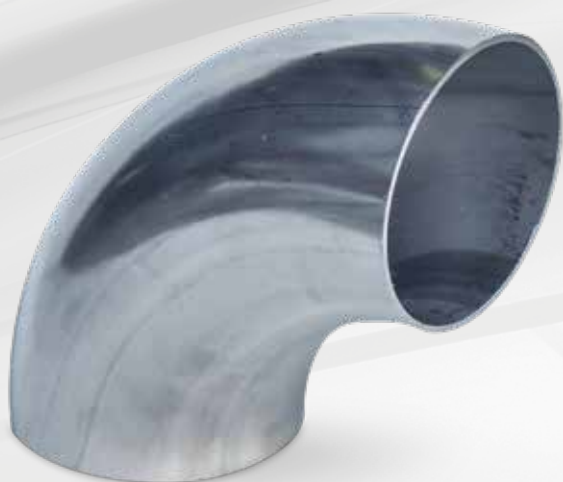


Curva elettrounita D3 90° 
EN 10253-3/4 - Acciaio Inox
Welded elbow 3D 90° - Stainless steel 

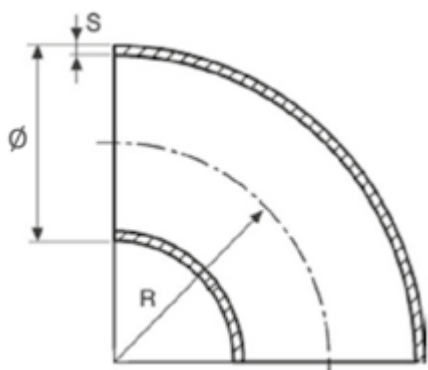


Ø	S	Cod.	€.	R	Kg.
21,3	2	4112021	3,23	28	0,040
26,9	2	4112026	3,23	29	0,060
33,7	2	4112033	3,42	38	0,100
	3	4113033	5,32	38	0,140
42,4	2	4112042	4,56	48	0,152
	3	4113042	7,22	48	0,210
48,3	2	4112048	5,70	57	0,215
	3	4113048	8,74	57	0,320
60,3	2	4112060	7,22	76	0,350
	3	4113060	12,35	76	0,500
76,1	2	4112076	13,87	95	0,560
	3	4113076	17,82	95	0,640
88,9	2	4112088	18,43	114	0,810
	3	4113088	24,51	114	1,130
114,3	2	4112114	24,70	152	1,300
	3	4113114	37,58	152	1,580
139,7	2	4112139	53,77	190	2,100
	3	4113139	68,40	190	3,140
168,3	2	4112168	69,54	229	2,840
	3	4113168	99,37	229	4,390
219,1	2	4112219	129,01	305	5,150
	3	4113219	178,60	305	7,370
273	2	4112273	289,60	381	-
	3	4113273	360,40	381	-
323,9	2	4112323	421,60	457	-
	3	4113323	469,20	457	-



Riduzione concentrica elettrounita 
ISO 5251 - Acciaio Inox
Welded concentric reduction- Stainless steel 

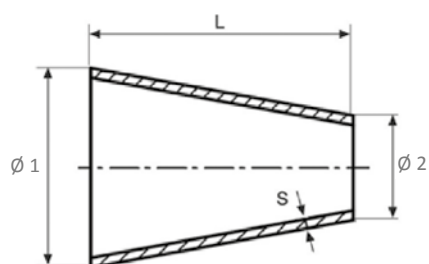

Ø 1	Ø 2	S	Cod.	€.	L	Kg.
21,3	17,2	2	4042021017	4,55	28	0,027
26,9	21,3	2	4042026021	4,65	36	0,046
33,7	21,3	2	4042033021	3,30	51	0,070
		3	4043033021	5,35	51	0,106
	26,9	2	4042033026	3,20	51	0,078
		3	4043033026	5,25	51	0,116
42,4	21,3	2	4042042021	4,55	51	0,082
		3	4043042021	7,80	51	0,122
	26,9	2	4042042026	4,50	51	0,089
		3	4043042026	7,65	51	0,133
	33,7	2	4042042033	4,40	51	0,097
		3	4043042033	7,40	51	0,146
48,3	21,3	2	4042048021	6,15	64	0,112
		3	4043048021	10,40	64	0,168
	26,9	2	4042048026	5,90	64	0,121
		3	4043048026	10,20	64	0,181
	33,7	2	4042048033	5,80	64	0,132
		3	4043048033	9,90	64	0,198
	42,4	2	4042048042	5,70	64	0,146
		3	4043048042	9,75	64	0,219
60,3	26,9	2	4042060026	7,60	76	0,166
		3	4043060026	12,05	76	0,250
	33,7	2	4042060033	7,05	76	0,179
		3	4043060033	11,80	76	0,269
	42,4	2	4042060042	6,75	76	0,196
		3	4043060042	11,35	76	0,294
	48,3	2	4042060048	6,50	76	0,207
		3	4043060048	11,05	76	0,311

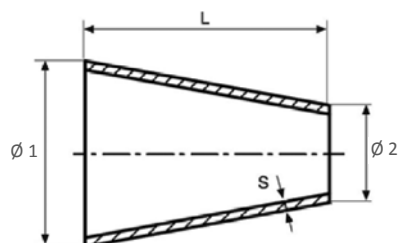


Ø 1	Ø 2	S	Cod.	€.	L	Kg.
76,1	26,9	2	4042076026	37,90	89	0,230
		3	4043076026	43,20	89	0,345
	33,7	2	4042076033	15,50	93	0,245
		3	4043076033	19,95	93	0,368
	42,4	2	4042076042	8,65	84	0,265
		3	4043076042	14,85	84	0,397
	48,3	2	4042076048	8,50	84	0,278
		3	4043076048	14,35	84	0,417
	60,3	2	4042076060	8,20	84	0,305
		3	4043076060	14,10	84	0,457
88,9	42,4	2	4042088042	10,40	93	0,294
		3	4043088042	17,95	93	0,440
	48,3	2	4042088048	10,05	88	0,307
		3	4043088048	17,20	88	0,460
	60,3	2	4042088060	9,85	84	0,334
		3	4043088060	17,05	84	0,500
	76,1	2	4042088076	9,75	84	0,369
		3	4043088076	16,65	84	0,553
	88,9	2	4042114048	16,35	118	0,417
		3	4043114048	26,85	118	0,625
114,3	60,3	2	4042114060	14,90	102	0,447
		3	4043114060	25,05	102	0,671
	76,1	2	4042114076	14,50	102	0,488
		3	4043114076	24,05	102	0,732
	88,9	2	4042114088	14,20	102	0,521
		3	4043114088	23,50	102	0,781
	114,3	2	4042139060	28,60	130	0,638
		3	4043139060	41,65	130	0,957
	139,7	2	4042139076	24,30	130	0,688
		3	4043139076	35,90	130	1,033
139,7	88,9	2	4042139088	23,50	125	0,729
		3	4043139088	34,35	125	1,094
	114,3	2	4042139114	21,90	125	0,810
		3	4043139114	32,65	125	1,215

Ø 1	Ø 2	S	Cod.	€.	L	Kg.
168,3	76,1	2	4042168076	39,10	145	0,860
		3	4043168076	55,95	145	1,289
	88,9	2	4042168088	35,55	145	0,905
		3	4043168088	44,95	145	1,357
	114,3	2	4042168114	33,50	145	0,994
		3	4043168114	42,70	145	1,491
	139,7	2	4042168139	32,45	145	1,083
		3	4043168139	41,40	145	1,625
	219,1	2	4042219114	55,45	151	1,273
		3	4043219114	82,50	151	1,910
273	139,7	2	4042273139	a richiesta	178	1,845
		3	4043273139	143,60	178	2,768
	168,3	2	4042273168	118,00	178	1,973
		3	4043273168	140,40	178	2,960
	219,1	2	4042273219	112,00	178	2,200
		3	4043273219	137,00	178	3,301
	323,9	2	4042323219	a richiesta	203	2,769
		3	4043323219	197,70	203	4,153
	273,0	2	4042323273	a richiesta	203	3,044
		3	4043323273	193,60	203	4,566




Tee elettrounito EN 10253-3 - Acciaio Inox 
Welded tee- Stainless steel 

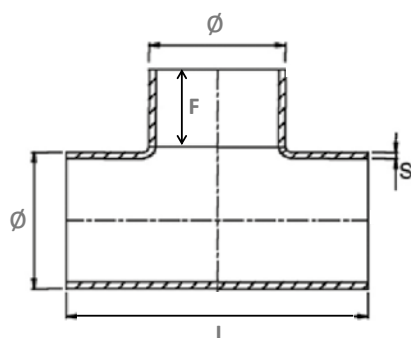

Ø	S	Cod.	€.	L	F	Kg.
21,3	2	4072021	6,80	56	15	0,060
26,9	2	4072026	7,30	64	15	0,080
33,7	2	4072033	7,55	74	20	0,140
	3	4073033	10,10	74	20	0,220
42,4	2	4072042	10,00	94	25	0,230
	3	4073042	13,10	94	25	0,350
48,3	2	4072048	11,60	108	30	0,310
	3	4073048	15,45	108	30	0,410
60,3	2	4072060	14,15	128	30	0,410
	3	4073060	19,60	128	30	0,610
76,1	2	4072076	19,00	153	40	0,610
	3	4073076	25,75	153	40	0,940
88,9	2	4072088	27,45	172	45	0,860
	3	4073088	37,10	172	45	1,260
114,3	2	4072114	39,65	225	55	1,270
	3	4073114	55,85	225	55	1,980
139,7	2	4072139	65,90	270	60	1,860
	3	4073139	93,50	270	60	2,780
168,3	2	4072168	87,25	305	75	2,980
	3	4073168	125,35	305	75	3,810
219,1	2	4072219	144,40	400	90	4,380
	3	4073219	215,05	400	90	6,510




Cartella di appoggio - Acciaio Inox 
per flange EN 1092-1 tipo 02
Stub end- Stainless steel 

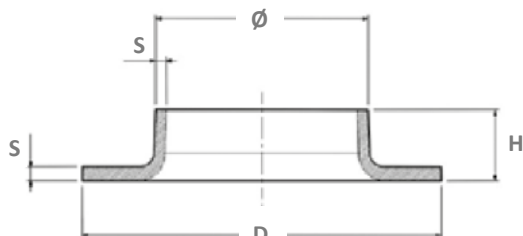


Ø	S	Cod.	€.	D	H	Kg.
21,3	2	4092021	0,70	45	7	0,025
	3	4093021	1,15	45	7	0,032
26,9	2	4092026	0,90	57	7	0,038
	3	4093026	1,45	57	7	0,058
33,7	2	4092033	1,00	68	8	0,055
	3	4093033	1,95	68	8	0,080
42,4	2	4092042	1,15	77	9	0,068
	3	4093042	2,25	77	9	0,125
48,3	2	4092048	1,40	88	9	0,085
	3	4093048	2,75	88	9	0,130
60,3	2	4092060	1,75	102	10	0,115
	3	4093060	3,55	102	10	0,175
76,1	2	4092076	2,55	122	10	0,150
	3	4093076	4,55	122	10	0,225
88,9	2	4092088	3,20	137	10	0,170
	3	4093088	5,20	137	10	0,250
114,3	2	4092114	4,80	159	10	0,200
	3	4093114	7,80	159	10	0,316
139,7	2	4092139	6,05	185	14	0,300
	3	4093139	9,45	185	14	0,400
168,3	2	4092168	7,20	215	17	0,350
	3	4093168	11,75	215	17	0,475
219,1	2	4092219	11,75	267	18	0,500
	3	4093219	16,95	267	18	0,725
273	2	4092273	17,30	320	18	-
	3	4093273	22,65	320	18	-
323,9	2	4092323	20,20	382	18	-
	3	4093323	27,70	382	18	-




Fondello EN10253-3 - Acciaio inox 
Cap - Stainless steel 

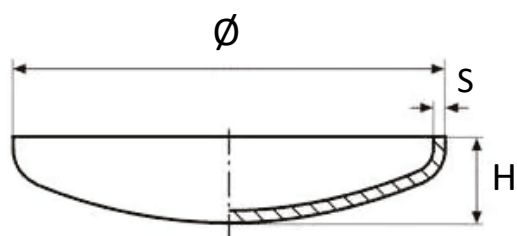

Ø	S	Cod.	€.	H	Kg.
21,3	2	4062021	1,03	9	0,015
26,9	2	4062026	1,03	10,5	0,015
33,7	2	4062033	1,54	12,5	0,023
	3	4063033	2,19	14,5	0,035
42,4	2	4062042	1,88	17	0,042
	3	4063042	3,01	18	0,063
48,3	2	4062048	2,36	17	0,050
	3	4063048	3,39	17	0,087
60,3	2	4062060	2,91	20	0,076
	3	4063060	4,51	22	0,115
76,1	2	4062076	4,10	27	0,131
	3	4063076	6,38	29	0,196
88,9	2	4062088	4,96	29	0,166
	3	4063088	8,05	30	0,249
114,3	2	4062114	6,84	32	0,246
	3	4063114	9,27	32	0,369
139,7	2	4062139	8,55	35	0,372
	3	4063139	14,79	36	0,532
168,3	2	4062168	15,32	40	0,518
	3	4063168	18,81	42	0,776
219,1	2	4062219	23,60	50	0,849
	3	4063219	25,65	51	1,274
273	2	4062273	35,91	63	1,310
	3	4063273	50,10	62	1,966
323,9	2	4062323	46,17	72	1,814
	3	4063323	75,24	72	2,720

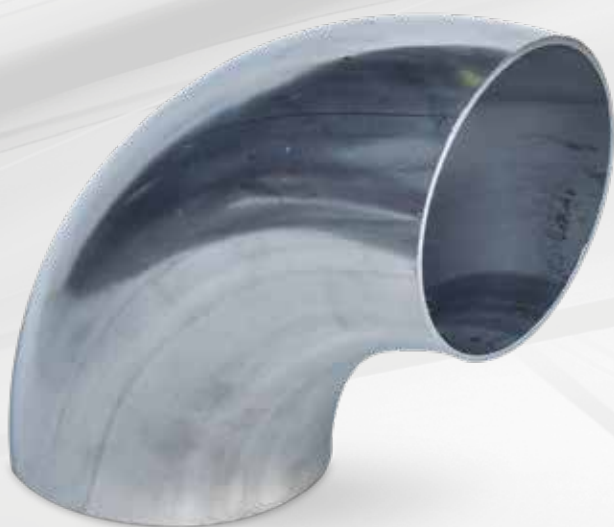


Curva elettrounita D3 90° 
EN 10253-3/4 - Acciaio Inox
Welded elbow 3D 90° - Stainless steel 

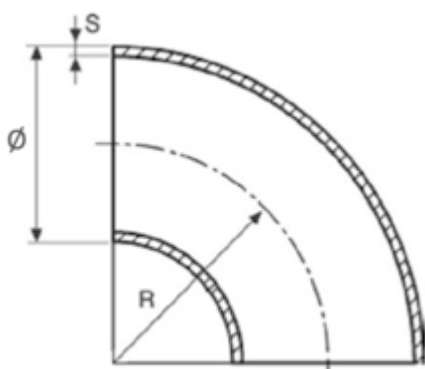


Ø	S	Cod.	€.	R	Kg.
21,3	2	6112021	3,88	28	0,040
26,9	2	6112026	3,91	29	0,060
33,7	2	6112033	4,10	38	0,100
	3	6113033	7,03	38	0,140
42,4	2	6112042	5,89	48	0,152
	3	6113042	9,50	48	0,210
48,3	2	6112048	6,84	57	0,215
	3	6113048	11,82	57	0,320
60,3	2	6112060	10,72	76	0,350
	3	6113060	16,91	76	0,500
76,1	2	6112076	19,57	95	0,560
	3	6113076	25,46	95	0,640
88,9	2	6112088	26,03	114	0,810
	3	6113088	34,96	114	1,130
114,3	2	6112114	37,24	152	1,300
	3	6113114	56,62	152	1,580
139,7	2	6112139	76,90	190	2,100
	3	6113139	94,80	190	3,140
168,3	2	6112168	98,80	229	2,840
	3	6113168	150,10	229	4,390
219,1	2	6112219	178,22	305	5,150
	3	6113219	258,40	305	7,370
273	2	6112273	380,60	381	-
	3	6113273	387,60	381	-
323,9	2	6112323	551,00	457	-
	3	6113323	580,00	457	-



Riduzione concentrica elettrounita 
ISO 5251 - Acciaio Inox
Welded concentric reduction- Stainless steel 

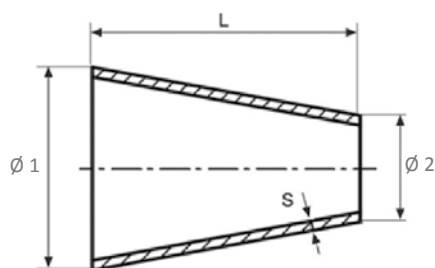

Ø 1	Ø 2	S	Cod.	€.	L	Kg.
21,3	17,2	2	6042021017	6,55	28	0,027
26,9	21,3	2	6042026021	5,65	36	0,046
33,7	21,3	2	6042033021	4,60	51	0,070
		3	6043033021	9,10	51	0,106
	26,9	2	6042033026	4,40	51	0,078
		3	6043033026	7,30	51	0,116
42,4	21,3	2	6042042021	7,05	51	0,082
		3	6043042021	10,10	51	0,122
	26,9	2	6042042026	6,75	51	0,089
		3	6043042026	9,65	51	0,133
	33,7	2	6042042033	6,60	51	0,097
		3	6043042033	9,40	51	0,146
48,3	21,3	2	6042048021	9,00	64	0,112
		3	6043048021	13,45	64	0,168
	26,9	2	6042048026	8,80	64	0,121
		3	6043048026	13,30	64	0,181
	33,7	2	6042048033	8,65	64	0,132
		3	6043048033	12,85	64	0,198
	42,4	2	6042048042	8,40	64	0,146
		3	6043048042	12,55	64	0,219
60,3	26,9	2	6042060026	10,70	76	0,166
		3	6043060026	16,10	76	0,250
	33,7	2	6042060033	10,15	76	0,179
		3	6043060033	15,75	76	0,269
	42,4	2	6042060042	9,80	76	0,196
		3	6043060042	15,25	76	0,294
	48,3	2	6042060048	9,55	76	0,207
		3	6043060048	14,80	76	0,311

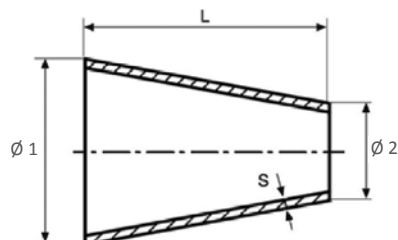


Ø 1	Ø 2	S	Cod.	€.	L	Kg.
76,1	26,9	2	6042076026	47,30	89	0,230
		3	6043076026	53,40	89	0,345
	33,7	2	6042076033	24,70	93	0,245
		3	6043076033	28,30	93	0,368
	42,4	2	6042076042	12,05	84	0,265
		3	6043076042	18,25	84	0,397
	48,3	2	6042076048	11,70	84	0,278
		3	6043076048	17,95	84	0,417
	60,3	2	6042076060	11,35	84	0,305
		3	6043076060	17,70	84	0,457
88,9	42,4	2	6042088042	13,35	93	0,294
		3	6043088042	20,85	93	0,440
	48,3	2	6042088048	12,70	88	0,307
		3	6043088048	20,35	88	0,460
	60,3	2	6042088060	12,60	84	0,334
		3	6043088060	20,20	84	0,500
	76,1	2	6042088076	12,35	84	0,369
		3	6043088076	20,20	84	0,553
	48,3	2	6042114048	23,25	118	0,417
		3	6043114048	33,50	118	0,625
114,3	60,3	2	6042114060	19,65	102	0,447
		3	6043114060	32,20	102	0,671
	76,1	2	6042114076	19,15	102	0,488
		3	6043114076	31,55	102	0,732
	88,9	2	6042114088	18,75	102	0,521
		3	6043114088	30,80	102	0,781
	60,3	2	6042139060	39,10	130	0,638
		3	6043139060	57,50	130	0,957
	76,1	2	6042139076	32,85	130	0,688
		3	6043139076	53,45	130	1,033
139,7	88,9	2	6042139088	31,70	125	0,729
		3	6043139088	51,35	125	1,094
	114,3	2	6042139114	29,25	125	0,810
		3	6043139114	49,55	125	1,215

Ø 1	Ø 2	S	Cod.	€.	L	Kg.
168,3	76,1	2	6042168076	58,75	145	0,860
		3	6043168076	77,90	145	1,289
	88,9	2	6042168088	46,25	145	0,905
		3	6043168088	70,00	145	1,357
	114,3	2	6042168114	44,45	145	0,994
		3	6043168114	65,65	145	1,491
	139,7	2	6042168139	42,95	145	1,083
		3	6043168139	63,75	145	1,625
	114,3	2	6042219114	81,25	151	1,273
		3	6043219114	122,10	151	1,910
219,1	139,7	2	6042219139	69,75	151	1,370
		3	6043219139	111,10	151	2,055
	168,3	2	6042219168	62,10	151	1,479
		3	6043219168	100,65	151	2,219
	139,7	2	6042273139	a richiesta	178	1,845
		3	6043273139	195,40	178	2,768
	168,3	2	6042273168	146,60	178	1,973
		3	6043273168	183,30	178	2,960
	219,1	2	6042273219	140,60	178	2,200
		3	6043273219	172,50	178	3,301
273	219,1	2	6042323219	a richiesta	203	2,769
		3	6043323219	248,72	203	4,153
	273,0	2	6042323273	a richiesta	203	3,044
		3	6043323273	237,50	203	4,566




Tee elettrounito EN 10253-3 - Acciaio Inox 
Welded tee- Stainless steel 

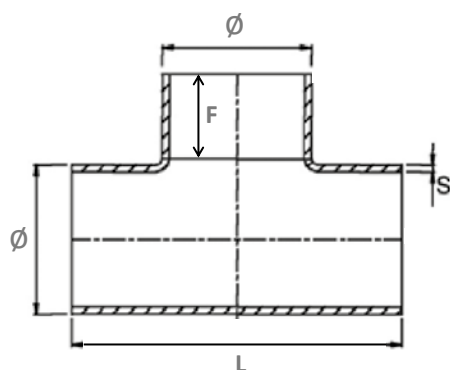

Ø	S	Cod.	€.	L	F	Kg.
21,3	2	6072021	8,45	56	15	0,060
26,9	2	6072026	8,95	64	15	0,080
33,7	2	6072033	9,50	74	20	0,140
	3	6073033	12,95	74	20	0,220
42,4	2	6072042	11,95	94	25	0,230
	3	6073042	16,30	94	25	0,350
48,3	2	6072048	15,10	108	30	0,310
	3	6073048	21,05	108	30	0,410
60,3	2	6072060	17,95	128	30	0,410
	3	6073060	26,15	128	30	0,610
76,1	2	6072076	28,75	153	40	0,610
	3	6073076	33,75	153	40	0,940
88,9	2	6072088	44,15	172	45	0,860
	3	6073088	49,15	172	45	1,260
114,3	2	6072114	61,70	225	55	1,270
	3	6073114	82,30	225	55	1,980
139,7	2	6072139	89,90	270	60	1,860
	3	6073139	116,75	270	60	2,780
168,3	2	6072168	127,05	305	75	2,980
	3	6073168	173,60	305	75	3,810
219,1	2	6072219	301,00	400	90	4,380
	3	6073219	300,15	400	90	6,510




Cartella di appoggio - Acciaio Inox 
per flange EN 1092-1 tipo 02
Stub end- Stainless steel 

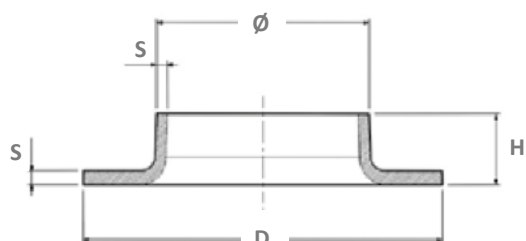

Ø	S	Cod.	€.	D	H	Kg.
21,3	2	6092021	1,05	45	7	0,025
	3	6093021	1,85	45	7	0,032
26,9	2	6092026	1,20	57	7	0,038
	3	6093026	2,25	57	7	0,058
33,7	2	6092033	1,45	68	8	0,055
	3	6093033	2,80	68	8	0,080
42,4	2	6092042	2,15	77	9	0,068
	3	6093042	3,35	77	9	0,125
48,3	2	6092048	2,40	88	9	0,085
	3	6093048	3,70	88	9	0,130
60,3	2	6092060	3,40	102	10	0,115
	3	6093060	5,20	102	10	0,175
76,1	2	6092076	5,40	122	10	0,150
	3	6093076	7,65	122	10	0,225
88,9	2	6092088	5,65	137	10	0,170
	3	6093088	9,10	137	10	0,250
114,3	2	6092114	8,55	159	10	0,200
	3	6093114	13,15	159	10	0,316
139,7	2	6092139	10,45	185	14	0,300
	3	6093139	15,65	185	14	0,400
168,3	2	6092168	12,05	215	17	0,350
	3	6093168	22,50	215	17	0,475
219,1	2	6092219	18,90	267	18	0,500
	3	6093219	26,40	267	18	0,725
273	2	6092273	21,20	320	18	-
	3	6093273	29,00	320	18	-
323,9	2	6092323	25,95	382	18	-
	3	6093323	48,20	382	18	-



Fondello EN10253-3 - Acciaio inox 
Cap - Stainless steel 

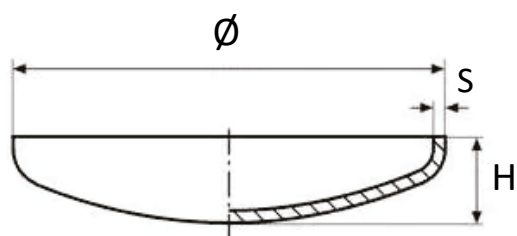


Ø	S	Cod.	€.	H	Kg.
21,3	2	6062021	1,37	9	0,015
26,9	2	6062026	1,37	10,5	0,015
33,7	2	6062033	2,05	12,5	0,023
	3	6063033	2,70	14,5	0,035
42,4	2	6062042	2,74	17	0,042
	3	6063042	3,90	18	0,063
48,3	2	6062048	3,42	17	0,050
	3	6063048	4,86	17	0,087
60,3	2	6062060	4,19	20	0,076
	3	6063060	6,19	22	0,115
76,1	2	6062076	5,63	27	0,131
	3	6063076	7,35	29	0,196
88,9	2	6062088	6,70	29	0,166
	3	6063088	9,37	30	0,249
114,3	2	6062114	8,76	32	0,246
	3	6063114	12,52	32	0,369
139,7	2	6062139	12,48	35	0,372
	3	6063139	17,92	36	0,532
168,3	2	6062168	19,60	40	0,518
	3	6063168	28,71	42	0,776
219,1	2	6062219	34,08	50	0,849
	3	6063219	48,84	51	1,274
273	2	6062273	52,43	63	1,310
	3	6063273	70,01	62	1,966
323,9	2	6062323	64,22	72	1,814
	3	6063323	107,76	72	2,720



4




Raccordi a saldare ASME
Welding fittings






Curva senza saldatura in AISI 304/L
ASME B16.9 - ASTM A 403
Seamless elbow - Stainless steel

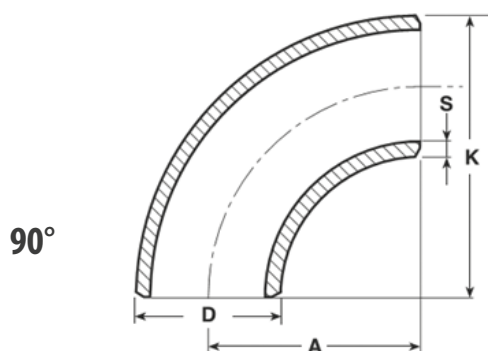

SCH. 10S

D	Cod.	€.	S	A	K	Kg.
1/2"	41110102	4,13	2,11	38,1	47,6	0,06
3/4"	41110304	5,50	2,11	38,1	42,9	0,07
1"	41110001	6,87	2,77	38,1	55,6	0,14
1 1/4"	41110114	9,57	2,77	47,6	69,8	0,23
1 1/2"	41110112	12,24	2,77	57,2	82,5	0,30
2"	41110002	14,83	2,77	76,2	106,4	0,51
2 1/2"	41110212	21,13	3,05	95,2	131,8	0,85
3"	41110003	32,94	3,05	114,3	158,8	1,22
4"	41110004	56,27	3,05	152,4	209,6	2,15
5"	41110005	a richiesta	3,4	190,5	261,9	3,63
6"	41110006	142,72	3,4	228,6	312,7	4,90
8"	41110008	244,27	3,76	304,8	414,3	10,66

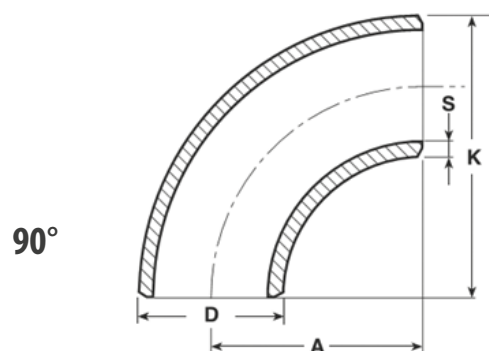


SCH. 40S

D	Cod.	€.	S	A	K	Kg.
1/2"	41140102	4,95	2,77	38,1	47,6	0,08
3/4"	41140304	6,59	2,87	38,1	42,9	0,09
1"	41140001	9,88	3,38	38,1	55,6	0,16
1 1/4"	41140114	13,30	3,56	47,6	69,8	0,25
1 1/2"	41140112	15,45	3,68	57,2	82,5	0,40
2"	41140002	19,16	3,91	76,2	106,4	0,71
2 1/2"	41140212	35,70	5,16	95,2	131,8	1,39
3"	41140003	57,36	5,49	114,3	158,8	2,18
4"	41140004	112,68	6,02	152,4	209,6	4,17
5"	41140005	a richiesta	6,55	190,5	261,9	6,86
6"	41140006	282,69	7,11	228,6	312,7	10,90
8"	41140008	573,61	8,18	304,8	414,3	21,5



Fondello bombato in AISI 304/L
ASME B16.9 - ASTM A 403
Cap - Stainless steel

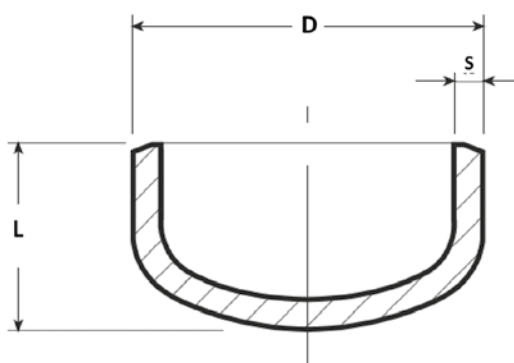

SCH. 10S

D	Cod.	€.	S	L	Kg.
1/2"	40610102	4,12	2,11	25,9	0,04
3/4"	40610304	5,33	2,11	25,9	0,06
1"	40610001	6,57	2,77	38,1	0,09
1 1/4"	40610114	6,85	2,77	38,1	0,13
1 1/2"	40610112	7,75	2,77	38,1	0,14
2"	40610002	7,69	2,77	38,1	0,19
2 1/2"	40610212	8,24	3,05	38,1	0,25
3"	40610003	18,00	3,05	50,8	0,40
4"	40610004	32,03	3,05	63,5	0,65
5"	40610005	38,45	3,4	76,2	1,02
6"	40610006	50,31	3,4	88,9	1,36
8"	40610008	76,90	3,76	101,6	2,49

SCH. 40S


D	Cod.	€.	S	L	Kg.
1/2"	40640102	5,62	2,77	25,9	0,05
3/4"	40640304	6,11	2,87	25,9	0,07
1"	40640001	8,55	3,38	38,1	0,13
1 1/4"	40640114	10,97	3,56	38,1	0,17
1 1/2"	40640112	10,68	3,68	38,1	0,23
2"	40640002	8,70	3,91	38,1	0,26
2 1/2"	40640212	16,76	5,16	38,1	0,45
3"	40640003	25,92	5,49	50,8	0,71
4"	40640004	41,18	6,02	63,5	1,22
5"	40640005	54,89	6,55	76,2	1,91
6"	40640006	80,81	7,11	88,9	3,23
8"	40640008	177,47	8,18	101,6	5,67




Riduzione concentrica in AISI 304/L SCH. 10S

ASME B16.9 - ASTM A403

Concentric reduction - Stainless steel

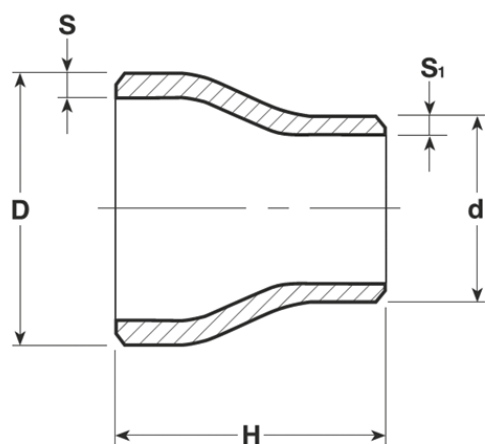

D	d	Cod.	€.	S	S1	H	Kg.
3/4"	1/2"	40410304102	4,86	2,11	2,11	38	1,10
1"	3/4"	40410001304	4,90	2,77	2,11	51	1,13
	1/2"	40410001102	5,08	2,77	2,11	51	1,12
1 1/4"	1"	40410114001	6,72	2,77	2,77	51	1,18
	3/4"	40410114304	7,13	2,77	2,11	51	1,18
	1/2"	40410114102	a richiesta	2,77	2,11	51	1,17
1 1/2"	1 1/4"	40410112114	8,25	2,77	2,77	64	0,21
	1"	40410112001	9,62	2,77	2,77	64	0,20
	3/4"	40410112304	9,88	2,77	2,11	64	0,20
	1/2"	40410112102	a richiesta	2,77	2,11	64	0,19
2"	1 1/2"	40410002112	9,62	2,77	2,77	76	0,31
	1 1/4"	40410002114	10,29	2,77	2,77	76	0,30
	1"	40410002001	10,43	2,77	2,77	76	0,28
	3/4"	40410002304	a richiesta	2,77	2,11	76	0,25
	1/2"	40410002102	a richiesta	2,77	2,11	76	0,23
2 1/2"	2"	40410212002	17,29	3,05	2,77	89	0,47
	1 1/2"	40410212112	18,67	3,05	2,77	89	0,44
	1 1/4"	40410212114	28,10	3,05	2,77	89	0,37
	1"	40410212001	a richiesta	3,05	2,77	89	0,35
3"	2 1/2"	40410003212	16,74	3,05	3,05	89	0,59
	2"	40410003002	16,47	3,05	2,77	89	0,55
	1 1/2"	40410003112	a richiesta	3,05	2,77	89	0,51
	1 1/4"	40410003114	a richiesta	3,05	2,77	89	0,43
	1"	40410003001	a richiesta	3,05	2,77	89	0,49

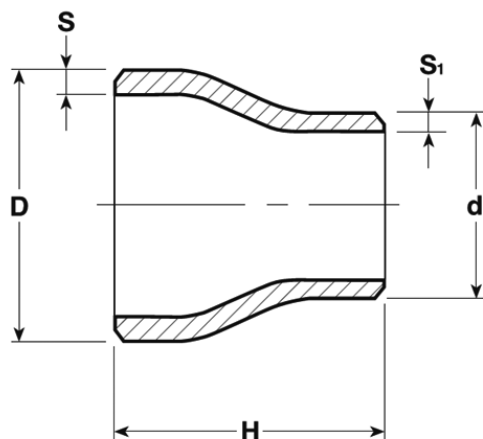


4"	3"	40410004003	26,63	3,05	3,05	102	0,87
	2 1/2"	40410004212	26,63	3,05	3,05	102	0,83
	2"	40410004002	26,37	3,05	2,77	102	0,78
	1 1/2"	40410004112	a richiesta	3,05	2,77	102	0,62
	1 1/4"	40410004114	a richiesta	3,05	2,77	102	0,60
	1"	40410004001	a richiesta	3,05	2,77	102	0,58
5"	4"	40410005004	58,56	3,4	3,05	127	1,48
	3"	40410005003	53,53	3,4	3,05	127	1,46
	2 1/2"	40410005212	a richiesta	3,4	3,05	127	1,43
	2"	40410005002	a richiesta	3,4	2,77	127	1,40
6"	5"	40410006005	53,53	3,4	3,4	140	2,05
	4"	40410006004	57,62	3,4	3,05	140	1,95
	3"	40410006003	60,39	3,4	3,05	140	1,82
	2 1/2"	40410006212	a richiesta	3,4	3,05	140	1,80
	2"	40410006002	a richiesta	3,4	2,77	140	1,77
	1 1/2"	40410006112	a richiesta	3,4	2,77	140	1,75
8"	6"	40410008006	104,28	3,76	3,4	152	3,19
	5"	40410008005	98,82	3,76	3,4	152	3,08
	4"	40410008004	160,53	3,76	3,05	152	3,02
	3"	40410008003	a richiesta	3,76	3,05	152	2,97




Riduzione concentrica in AISI 304/L SCH. 40S

ASME B16.9 - ASTM A403

Concentric reduction - Stainless steel

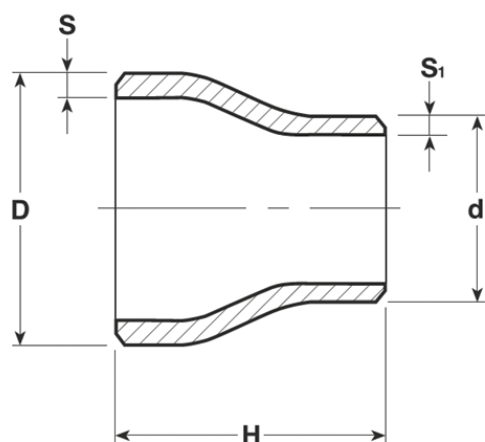


D	d	Cod.	€.	S	S1	H	Kg.
3/4"	1/2"	40440304102	5,08	2,87	2,77	38	0,14
1"	3/4"	40440001304	5,50	3,38	2,87	51	0,16
	1/2"	40440001102	5,37	3,38	2,77	51	0,15
1 1/4"	1"	40440114001	8,25	3,56	3,38	51	0,22
	3/4"	40440114304	9,62	3,56	2,87	51	0,22
1 1/2"	1/2"	40440114102	a richiesta	3,56	2,77	51	0,20
	1 1/4"	40440112114	9,88	3,68	3,56	64	0,28
	1"	40440112001	10,43	3,68	3,38	64	0,26
	3/4"	40440112304	15,27	3,68	2,87	64	0,26
2"	1/2"	40440112102	a richiesta	3,68	2,77	64	0,24
	1 1/2"	40440002112	11,79	3,91	3,68	76	0,45
	1 1/4"	40440002114	14,83	3,91	3,56	76	0,44
	1"	40440002001	13,17	3,91	3,38	76	0,40
	3/4"	40440002304	a richiesta	3,91	2,87	76	0,37
2 1/2"	1/2"	40440002102	a richiesta	3,91	2,77	76	0,35
	2"	40440212002	23,62	5,16	3,91	89	0,80
	1 1/2"	40440212112	32,22	5,16	3,68	89	0,77
	1 1/4"	40440212114	a richiesta	5,16	3,56	89	0,63
	1"	40440212001	a richiesta	5,16	3,38	89	0,60
3"	2 1/2"	40440003212	28,83	5,49	5,16	89	1,08
	2"	40440003002	28,54	5,49	3,91	89	1,00
	1 1/2"	40440003112	a richiesta	5,49	3,68	89	0,94
	1 1/4"	40440003114	a richiesta	5,49	3,56	89	0,75
	1"	40440003001	a richiesta	5,49	3,38	89	0,85

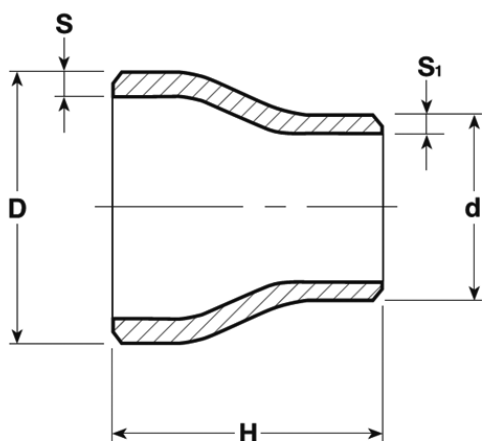

4"	3"	40440004003	46,58	6,02	5,49	102	1,74
	2 1/2"	40440004212	43,92	6,02	5,16	102	1,66
	2"	40440004002	50,78	6,02	3,91	102	1,57
	1 1/2"	40440004112	a richiesta	6,02	3,68	102	1,18
	1 1/4"	40440004114	a richiesta	6,02	3,56	102	1,16
	1"	40440004001	a richiesta	6,02	3,38	102	1,13
5"	4"	40440005004	100,34	6,55	6,02	127	2,98
	3"	40440005003	87,84	6,55	5,49	127	2,85
	2 1/2"	40440005212	a richiesta	6,55	5,16	127	2,80
	2"	40440005002	a richiesta	6,55	3,91	127	2,75
6"	5"	40440006005	115,26	7,11	6,55	140	4,18
	4"	40440006004	109,77	7,11	6,02	140	4,08
	3"	40440006003	120,77	7,11	5,49	140	3,98
	2 1/2"	40440006212	a richiesta	7,11	5,16	140	3,95
	2"	40440006002	a richiesta	7,11	3,91	140	3,90
	1 1/2"	40440006112	a richiesta	7,11	3,68	140	3,85
8"	6"	40440008006	175,67	8,18	7,11	152	6,94
	5"	40440008005	239,61	8,18	6,55	152	6,70
	4"	40440008004	a richiesta	8,18	6,02	152	6,55
	3"	40440008003	a richiesta	8,18	5,49	152	6,50



Tee normali in AISI 304/L
ASME B16.9 - ASTM A403
Equal tee - Stainless steel

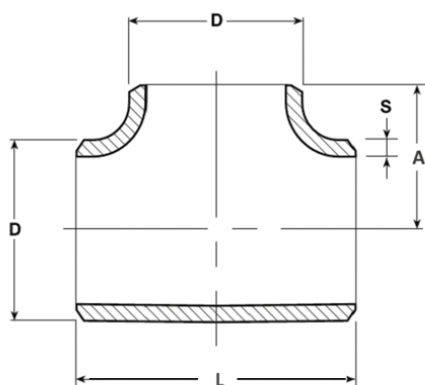

SCH. 10S


D	Cod.	€.	S	L	A	Kg.
1/2"	40710102	9,20	2,11	50,8	25,4	0,07
3/4"	40710304	10,17	2,11	57	28,5	0,09
1"	40710001	12,37	2,77	76,2	38,1	0,20
1 1/4"	40710114	14,83	2,77	95,2	47,6	0,33
1 1/2"	40710112	20,59	2,77	114,2	57,1	0,46
2"	40710002	23,07	2,77	127	63,5	0,63
2 1/2"	40710212	34,29	3,05	152,4	76,2	1,10
3"	40710003	48,04	3,05	171,4	85,7	1,37
4"	40710004	73,56	3,05	209,6	104,8	2,15
5"	40710005	123,51	3,4	247,6	123,8	3,48
6"	40710006	148,22	3,4	285,6	142,8	4,76
8"	40710008	315,63	3,76	355,6	177,8	8,46

SCH. 40S

D	Cod.	€.	S	L	A	Kg.
1/2"	40740102	10,43	2,77	50,8	25,4	0,08
3/4"	40740304	11,54	2,87	57	28,5	0,11
1"	40740001	14,29	3,38	76,2	38,1	0,24
1 1/4"	40740114	17,03	3,56	95,2	47,6	0,41
1 1/2"	40740112	21,96	3,68	114,2	57,1	0,60
2"	40740002	30,75	3,91	127	63,5	0,87
2 1/2"	40740212	50,78	5,16	152,4	76,2	1,70
3"	40740003	76,86	5,49	171,4	85,7	1,90
4"	40740004	123,51	6,02	209,6	104,8	4,13
5"	40740005	238,78	6,55	247,6	123,8	6,55
6"	40740006	268,98	7,11	285,6	142,8	9,73
8"	40740008	494,01	8,18	355,6	177,8	18,00




Curva senza saldatura in AISI 316/L
ASME B16.9 - ASTM A 403
Seamless elbow - Stainless steel

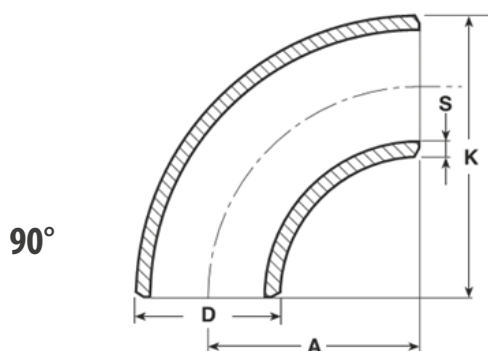

SCH. 10S

D	Cod.	€.	S	A	K	Kg.
1/2"	61110102	4,95	2,11	38,1	47,6	0,06
3/4"	61110304	6,04	2,11	38,1	42,9	0,07
1"	61110001	8,79	2,77	38,1	55,6	0,14
1 1/4"	61110114	11,05	2,77	47,6	69,8	0,23
1 1/2"	61110112	16,49	2,77	57,2	82,5	0,30
2"	61110002	18,67	2,77	76,2	106,4	0,51
2 1/2"	61110212	26,91	3,05	95,2	131,8	0,85
3"	61110003	42,28	3,05	114,3	158,8	1,22
4"	61110004	71,37	3,05	152,4	209,6	2,15
5"	61110005	a richiesta	3,4	190,5	261,9	3,63
6"	61110006	178,41	3,4	228,6	312,7	4,90
8"	61110008	345,83	3,76	304,8	414,3	10,66

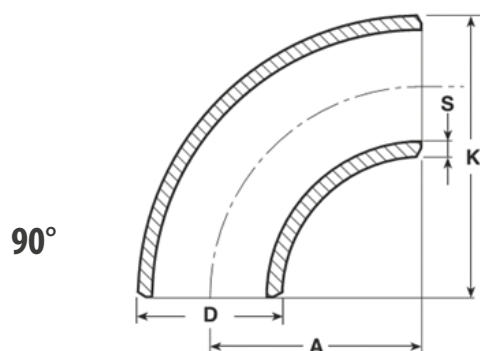


SCH. 40S

D	Cod.	€.	S	A	K	Kg.
1/2"	61140102	5,76	2,77	38,1	47,6	0,08
3/4"	61140304	7,59	2,87	38,1	42,9	0,09
1"	61140001	11,25	3,38	38,1	55,6	0,16
1 1/4"	61140114	16,49	3,56	47,6	69,8	0,25
1 1/2"	61140112	19,16	3,68	57,2	82,5	0,40
2"	61140002	24,96	3,91	76,2	106,4	0,71
2 1/2"	61140212	48,04	5,16	95,2	131,8	1,39
3"	61140003	71,37	5,49	114,3	158,8	2,18
4"	61140004	139,97	6,02	152,4	209,6	4,17
5"	61140005	a richiesta	6,55	190,5	261,9	6,86
6"	61140006	315,63	7,11	228,6	312,7	10,90
8"	61140008	713,58	8,18	304,8	414,3	21,5



Fondello bombato in AISI 316/L 
ASME B16.9 - ASTM A 403
Cap - Stainless steel 

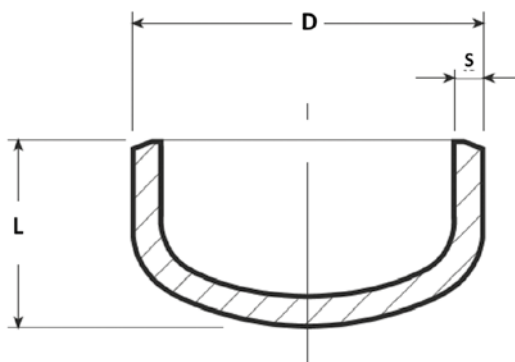


SCH. 10S


D	Cod.	€.	S	L	Kg.
1/2"	60610102	5,50	2,11	25,9	0,04
3/4"	60610304	7,37	2,11	25,9	0,06
1"	60610001	7,63	2,77	38,1	0,09
1 1/4"	60610114	9,16	2,77	38,1	0,13
1 1/2"	60610112	10,97	2,77	38,1	0,14
2"	60610002	8,55	2,77	38,1	0,19
2 1/2"	60610212	12,82	3,05	38,1	0,25
3"	60610003	19,81	3,05	50,8	0,40
4"	60610004	33,55	3,05	63,5	0,65
5"	60610005	38,10	3,4	76,2	1,02
6"	60610006	61,00	3,4	88,9	1,36
8"	60610008	97,60	3,76	101,6	2,49

SCH. 40S

D	Cod.	€.	S	L	Kg.
1/2"	60640102	7,00	2,77	25,9	0,05
3/4"	60640304	9,16	2,87	25,9	0,07
1"	60640001	10,97	3,38	38,1	0,13
1 1/4"	60640114	13,74	3,56	38,1	0,17
1 1/2"	60640112	13,74	3,68	38,1	0,23
2"	60640002	9,45	3,91	38,1	0,26
2 1/2"	60640212	15,87	5,16	38,1	0,45
3"	60640003	30,50	5,49	50,8	0,71
4"	60640004	51,84	6,02	63,5	1,22
5"	60640005	109,79	6,55	76,2	1,91
6"	60640006	100,57	7,11	88,9	3,23
8"	60640008	219,57	8,18	101,6	5,67

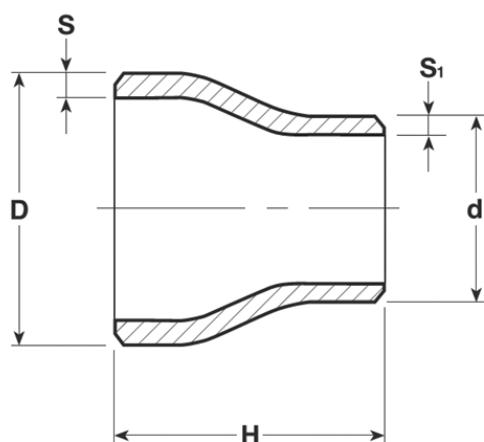**Riduzione concentrica in AISI 316/L SCH. 10S****ASME B16.9 - ASTM A403***Concentric reduction - Stainless steel*

D	d	Cod.	€.	S	S1	H	Kg.
3/4"	1/2"	60410304102	5,22	2,11	2,11	38	1,10
1"	3/4"	60410001304	6,17	2,77	2,11	51	1,13
	1/2"	60410001102	7,13	2,77	2,11	51	1,12
1 1/4"	1"	60410114001	8,10	2,77	2,77	51	1,18
	3/4"	60410114304	9,05	2,77	2,11	51	1,18
	1/2"	60410114102	12,26	2,77	2,11	51	1,17
1 1/2"	1 1/4"	60410112114	10,17	2,77	2,77	64	0,21
	1"	60410112001	11,54	2,77	2,77	64	0,20
	3/4"	60410112304	13,30	2,77	2,11	64	0,20
	1/2"	60410112102	a richiesta	2,77	2,11	64	0,19
2"	1 1/2"	60410002112	11,54	2,77	2,77	76	0,31
	1 1/4"	60410002114	13,46	2,77	2,77	76	0,30
	1"	60410002001	12,91	2,77	2,77	76	0,28
	3/4"	60410002304	24,57	2,77	2,11	76	0,25
	1/2"	60410002102	a richiesta	2,77	2,11	76	0,23
2 1/2"	2"	60410212002	20,87	3,05	2,77	89	0,47
	1 1/2"	60410212112	21,70	3,05	2,77	89	0,44
	1 1/4"	60410212114	30,67	3,05	2,77	89	0,37
	1"	60410212001	a richiesta	3,05	2,77	89	0,35
3"	2 1/2"	60410003212	20,87	3,05	3,05	89	0,59
	2"	60410003002	21,31	3,05	2,77	89	0,55
	1 1/2"	60410003112	23,33	3,05	2,77	89	0,51
	1 1/4"	60410003114	a richiesta	3,05	2,77	89	0,43
	1"	60410003001	a richiesta	3,05	2,77	89	0,49

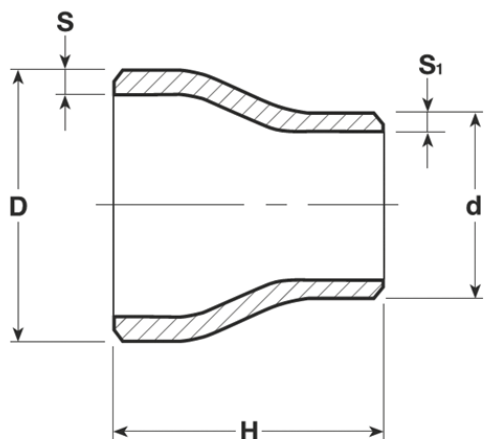


4"	3"	60410004003	31,84	3,05	3,05	102	0,87
	2 1/2"	60410004212	34,61	3,05	3,05	102	0,83
	2"	60410004002	35,96	3,05	2,77	102	0,78
	1 1/2"	60410004112	46,17	3,05	2,77	102	0,62
	1 1/4"	60410004114	a richiesta	3,05	2,77	102	0,60
	1"	60410004001	a richiesta	3,05	2,77	102	0,58
5"	4"	60410005004	74,55	3,4	3,05	127	1,48
	3"	60410005003	72,73	3,4	3,05	127	1,46
	2 1/2"	60410005212	a richiesta	3,4	3,05	127	1,43
	2"	60410005002	a richiesta	3,4	2,77	127	1,40
6"	5"	60410006005	87,84	3,4	3,4	140	2,05
	4"	60410006004	93,32	3,4	3,05	140	1,95
	3"	60410006003	98,82	3,4	3,05	140	1,82
	2 1/2"	60410006212	a richiesta	3,4	3,05	140	1,80
	2"	60410006002	a richiesta	3,4	2,77	140	1,77
	1 1/2"	60410006112	a richiesta	3,4	2,77	140	1,75
8"	6"	60410008006	126,26	3,76	3,4	152	3,19
	5"	60410008005	158,94	3,76	3,4	152	3,08
	4"	60410008004	184,06	3,76	3,05	152	3,02
	3"	60410008003	a richiesta	3,76	3,05	152	2,97




Riduzione concentrica in AISI 316/L SCH. 40S 

ASME B16.9 - ASTM A403

Concentric reduction - Stainless steel 

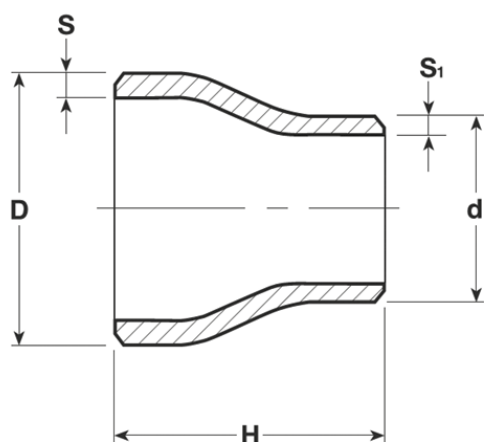


D	d	Cod.	€.	S	S1	H	Kg.
3/4"	1/2"	60440304102	6,30	2,87	2,77	38	0,14
1"	3/4"	60440001304	7,13	3,38	2,87	51	0,16
	1/2"	60440001102	6,87	3,38	2,77	51	0,15
1 1/4"	1"	60440114001	8,92	3,56	3,38	51	0,22
	3/4"	60440114304	9,88	3,56	2,87	51	0,22
	1/2"	60440114102	a richiesta	3,56	2,77	51	0,20
1 1/2"	1 1/4"	60440112114	12,63	3,68	3,56	64	0,28
	1"	60440112001	14,62	3,68	3,38	64	0,26
	3/4"	60440112304	13,74	3,68	2,87	64	0,26
	1/2"	60440112102	a richiesta	3,68	2,77	64	0,24
2"	1 1/2"	60440002112	15,09	3,91	3,68	76	0,45
	1 1/4"	60440002114	15,64	3,91	3,56	76	0,44
	1"	60440002001	17,03	3,91	3,38	76	0,40
	3/4"	60440002304	23,95	3,91	2,87	76	0,37
	1/2"	60440002102	a richiesta	3,91	2,77	76	0,35
2 1/2"	2"	60440212002	30,17	5,16	3,91	89	0,80
	1 1/2"	60440212112	32,94	5,16	3,68	89	0,77
	1 1/4"	60440212114	a richiesta	5,16	3,56	89	0,63
	1"	60440212001	35,96	5,16	3,38	89	0,60
3"	2 1/2"	60440003212	35,70	5,49	5,16	89	1,08
	2"	60440003002	35,70	5,49	3,91	89	1,00
	1 1/2"	60440003112	39,95	5,49	3,68	89	0,94
	1 1/4"	60440003114	a richiesta	5,49	3,56	89	0,75
	1"	60440003001	a richiesta	5,49	3,38	89	0,85

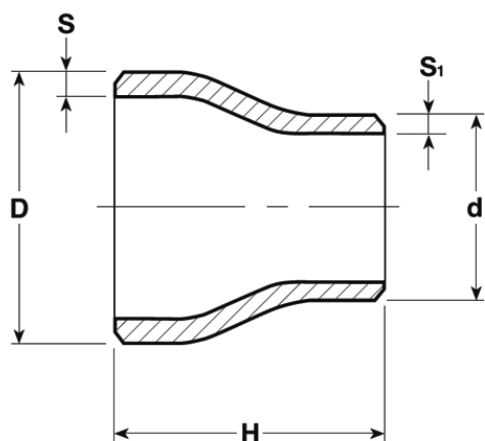

4"	3"	60440004003	59,03	6,02	5,49	102	1,74
	2 1/2"	60440004212	64,52	6,02	5,16	102	1,66
	2"	60440004002	64,52	6,02	3,91	102	1,57
	1 1/2"	60440004112	a richiesta	6,02	3,68	102	1,18
	1 1/4"	60440004114	a richiesta	6,02	3,56	102	1,16
	1"	60440004001	a richiesta	6,02	3,38	102	1,13
5"	4"	60440005004	111,82	6,55	6,02	127	2,98
	3"	60440005003	104,27	6,55	5,49	127	2,85
	2 1/2"	60440005212	a richiesta	6,55	5,16	127	2,80
	2"	60440005002	a richiesta	6,55	3,91	127	2,75
6"	5"	60440006005	165,06	7,11	6,55	140	4,18
	4"	60440006004	142,69	7,11	6,02	140	4,08
	3"	60440006003	a richiesta	7,11	5,49	140	3,98
	2 1/2"	60440006212	a richiesta	7,11	5,16	140	3,95
	2"	60440006002	a richiesta	7,11	3,91	140	3,90
	1 1/2"	60440006112	a richiesta	7,11	3,68	140	3,85
8"	6"	60440008006	263,48	8,18	7,11	152	6,94
	5"	60440008005	279,58	8,18	6,55	152	6,70
	4"	60440008004	a richiesta	8,18	6,02	152	6,55
	3"	60440008003	a richiesta	8,18	5,49	152	6,50



Tee normali in AISI 316/L
ASME B16.9 - ASTM A403
Equal tee - Stainless steel

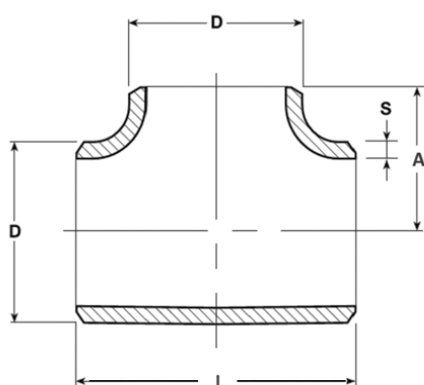


SCH. 10S


D	Cod.	€.	S	L	A	Kg.
1/2"	60710102	11,28	2,11	50,8	25,4	0,07
3/4"	60710304	12,91	2,11	57	28,5	0,09
1"	60710001	15,09	2,77	76,2	38,1	0,20
1 1/4"	60710114	20,59	2,77	95,2	47,6	0,33
1 1/2"	60710112	26,37	2,77	114,2	57,1	0,46
2"	60710002	30,20	2,77	127	63,5	0,63
2 1/2"	60710212	49,23	3,05	152,4	76,2	1,10
3"	60710003	68,61	3,05	171,4	85,7	1,37
4"	60710004	96,06	3,05	209,6	104,8	2,15
5"	60710005	205,86	3,4	247,6	123,8	3,48
6"	60710006	214,08	3,4	285,6	142,8	4,76
8"	60710008	452,85	3,76	355,6	177,8	8,46

SCH. 40S

D	Cod.	€.	S	L	A	Kg.
1/2"	60740102	11,67	2,77	50,8	25,4	0,08
3/4"	60740304	14,28	2,87	57	28,5	0,11
1"	60740001	17,83	3,38	76,2	38,1	0,24
1 1/4"	60740114	24,16	3,56	95,2	47,6	0,41
1 1/2"	60740112	29,63	3,68	114,2	57,1	0,60
2"	60740002	41,19	3,91	127	63,5	0,87
2 1/2"	60740212	74,11	5,16	152,4	76,2	1,70
3"	60740003	101,55	5,49	171,4	85,7	1,90
4"	60740004	178,41	6,02	209,6	104,8	4,13
5"	60740005	290,93	6,55	247,6	123,8	6,55
6"	60740006	406,19	7,11	285,6	142,8	9,73
8"	60740008	741,03	8,18	355,6	177,8	18,00

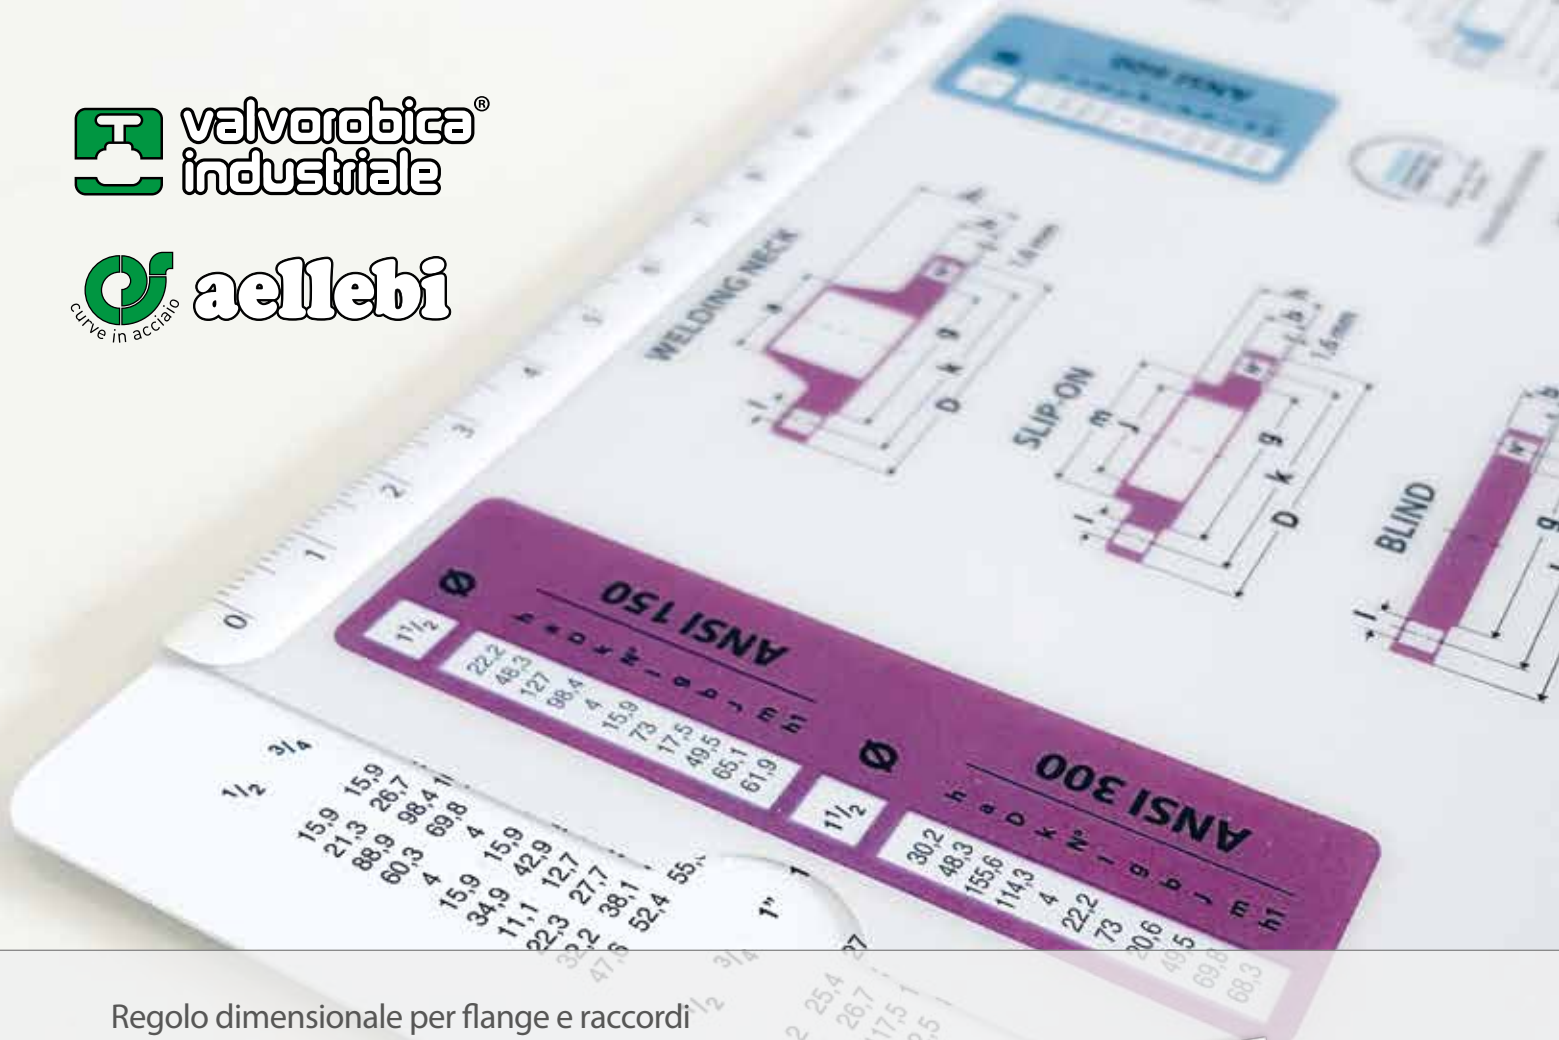

Regolo dimensionale per flange e raccordi
Slide rule for flanges and fittings

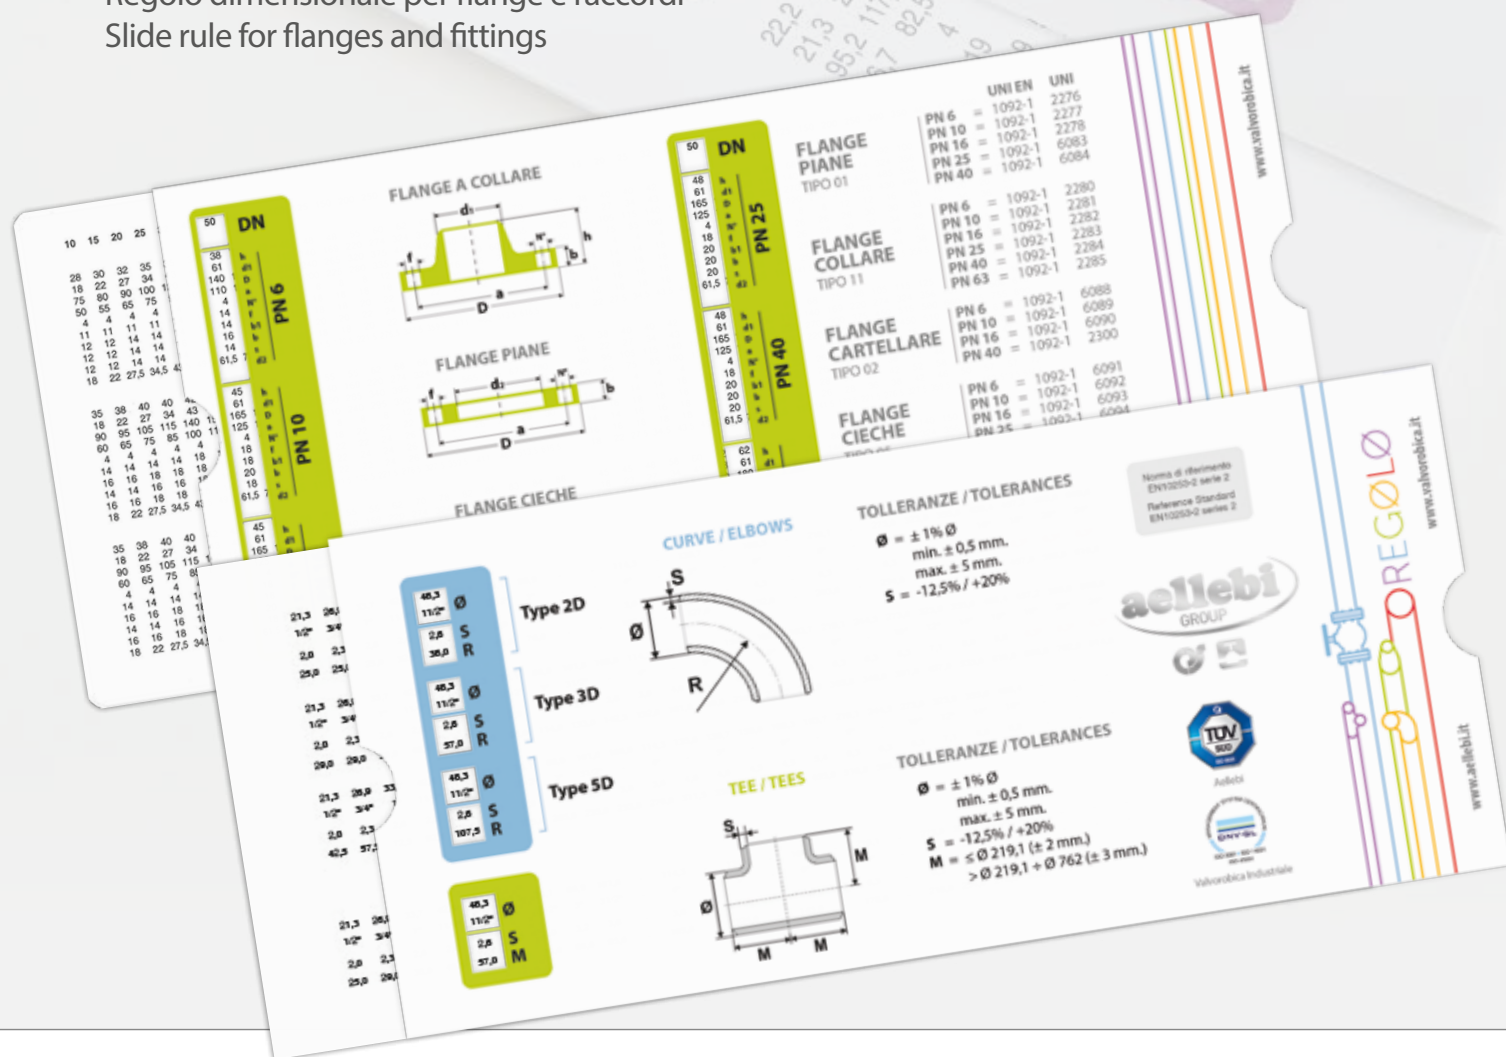

Richiedilo gratuitamente inviando una e-mail con i dati della tua azienda a info@valvorobica.it
Get it for free by sending an email with your company details to info@valvorobica.it